



MODEL 2002E

## MINIATURE ELECTRODYNAMIC INERTIAL SHAKER

- Compact size allows easy set-up for difficult-to-access locations
- 2 lbf (9 N) sine force excitation
- Direct mounting requires no special fixturing support or manual alignment
- In-line fuse for overcurrent protection
- Wide frequency range from 20 Hz to 3000 Hz
- Compatible with piezoelectric force transducers and shaker amplifiers

### TYPICAL APPLICATIONS

- General vibration testing and structural excitation
- Impedance measurements
- Experimental modal analysis
- Educational laboratory research
- Active vibration control



### FOR MODAL OR GENERAL EXCITATION

The Model 2002E Miniature Electrodynamic Inertial Shaker is a compact and lightweight force generator whose construction makes it well-suited for modal testing as well as a variety of general vibration testing applications.

The generator has a single 0.141 in (3.6 mm) diameter mounting through-hole and a rugged internal suspension system that eliminates test fixture requirements for most testing applications. Miscellaneous mounting screws are supplied to facilitate installation of the unit, either directly to the test structure or through a force sensor. The 2002E can be operated in any orientation and is therefore easily positioned for modal or general excitation applications offering optimal force performance over a wide 20 Hz to 3000 Hz frequency range.

A unique inverted armature coil design and the latest composite materials combine to offer excellent axial compliance and high lateral stiffness, ensuring reliability and robustness. When the 2002E is combined with a power amplifier and a piezoelectric force sensor (or impedance head) from PCB Piezotronics, Inc., the system becomes an ideal, compact force generator for driving point modal excitation or general purpose vibration excitation with unmatched reliability, performance and cost.


SPECIFICATIONS		
Performance		
Sine Force		
Natural Air Cooling	2 lbf pk	9 N pk
Forced Air Cooling <sup>[1]</sup>	4 lbf pk	18 N pk
Random Force		
Natural Air Cooling	1.4 lbf RMS	6.2 N RMS
Forced Air Cooling <sup>[1]</sup>	2.8 lbf RMS	12.5 N RMS
Shock Force (20 ms)	4.5 lbf pk	20.0 N pk
Low Frequency Force <sup>[2]</sup>	0.012 f <sup>2</sup> (0.35 – d)	
Maximum Displacement	0.35 in (pk-pk)	8.9 mm (pk-pk)
Maximum Velocity	20 in/s pk	508 mm/s pk
Frequency Range	20 Hz – 3000 Hz	20 Hz – 3000 Hz
Reaction Mass Resonance (Nominal)	10 Hz	10 Hz
Structural Resonance	3500 Hz – 4500 Hz	3500 Hz – 4500 Hz
Physical		
Dynamic Element Weight	0.33 lb	0.15 kg
Total Weight	0.56 lb	0.25 kg
Maximum Rated Armature Current		
Natural Air Cooling	1.1 A RMS	1.1 A RMS
Forced Air Cooling	2.2 A RMS	2.2 A RMS
Temperature Operating Range	40 °F – 100 °F	4 °C – 38 °C
Stray Magnetic Field		
Measured at 1.0 in (2.54 cm) distance	< 10 gauss	< 10 gauss
Cooling (> 2.0 lbf or > 9 N force)	3.5 CFM at 5 psi	99 L/min at 0.34 bar
Dimensions (diameter x length)	2.0 in x 1.5 in	50.8 mm x 38.1 mm
Mounting Hole	0.141 in x 1.5 in	3.6 mm x 38.1 mm
Supplied Accessories		
10 ft (3 cm) cable with in-line fuse		
Spare fuses: 1 A and 2 A		
Miscellaneous mounting screws and washers		
Heavy duty case		
Optional Accessories		
2100E23-100	SmartAmp™ Power Amplifier 100 W, 92% efficient, continuous gain adjustment	
208C01	Multi-purpose, ICP® force sensor, 10 lbf (45 N) compression and tension, 500 mV/lbf (112.41 mV/N)	
288D01	ICP® impedance head, force/accel: Force: 100 mV/lbf (22.4 mV/N); Accel: 100 mV/g (10.2 mV/(m/s <sup>2</sup> ))	

[1] Forced air cooling required for operation above 2 lbf (9 N)

[2] f=freq [Hz], d=disp. [in] pk-pk

## EXCITATION SIMPLIFIED

The compact design and portability make the 2002E Miniature Electrodynamic Inertial Shaker a very versatile, accessible and popular solution for test and instrumentation engineers. It is ideally suited for general purpose vibration testing for experimental modal, academic, biomedical or laboratory research.

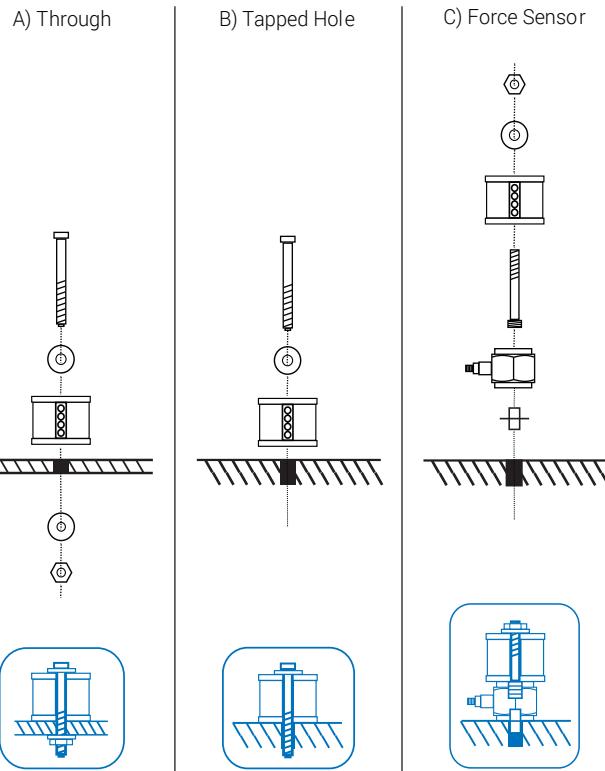

### Mounting Options



10310 Aerohub Boulevard, Cincinnati, OH 45215 USA

modalshop.com | info@modalshop.com | 800 860 4867 | +1 513 351 9919

© 2025 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [wwwpcb.com/trademarkownership](http://wwwpcb.com/trademarkownership). In the interest of constant product improvement, specifications are subject to change without notice.

DS-0124 revE