

MODEL K333D01-VM

DIGITAL VIBRATION METER KIT

- Turns your smartphone into a portable vibration meter
- Turn-key kit includes mounting hardware and connections
- Pre-programmed ISO vibration severity scales provide instant exceedance feedback
- Cost effective, ideal for beginners or for enhancing broader vibration programs
- In-app purchases expand functionality
- No prior training or experience needed
- Averaging and uploaded calibration values ensure quality data
- PDF report generation with images of critical assets


SIMPLIFY PREDICTIVE MAINTENANCE

Harness the power of your smartphone to make simple, accurate and reliable vibration level measurements on critical machinery using the Digital Vibration Meter Kit Model K333D01-VM. Plug the industry exclusive Digiducer® USB Digital Accelerometer into your smartphone for the same advantages that reliability professionals have come to expect with piezoelectric accelerometers. The USB Digital Accelerometer's wide range and accuracy captures machinery vibration events from imbalance to misalignment to bearing faults, gear mesh, and pump cavitation. With a hermetically sealed, stainless steel housing, the Digiducer is built to survive in tough environments.

The VibeCheck smartphone application supplied with the Digital Vibration Meter Kit comes with preset ISO vibration severity scales and alerts the user when vibration readings exceed acceptable thresholds. The application also creates PDF reports with images and isolates high frequency metal-to-metal impacts for easy identification. In-app purchases unlock advanced monitoring capabilities. VibeCheck ensures quality vibration data by automatically uploading the Digital USB Accelerometer's calibration value when connected.

Mounting accessories supplied with the Digital Vibration Meter Kit ensure vibration trends remain accurate even if data is taken by multiple technicians. The kit includes a magnet for curved or flat surfaces, probe tip, carrying pouch and all accessories required to connect to any smartphone.

| SPECIFICATIONS | |
|---|---------------------------------|
| Performance | |
| Acceleration Measurement | |
| Amplitude | 20 g pk (196 m/s ²) |
| High Pass Filter | 2 Hz |
| Fmax | 10 kHz |
| Averages | 4 |
| Velocity Measurement | |
| Amplitude | 122 in/s (3100 mm/s) |
| High Pass Filter | 10 Hz |
| Fmax | 1 kHz |
| Averages | 2 |
| Demodulation Measurement ^[1] | |
| Amplitude | 20 g pk (196 m/s ²) |
| High Pass Filter | 2 kHz |
| Low Pass Filter | 10 kHz |
| Demodulation Fmax | 1 kHz |
| Averages | 2 |
| Accuracy | ± 3% |
| Temp. Range ^[2] | 14 to 158 F (-10 to 70 C) |
| Transverse Sensitivity | ≤ 5 % |
| Power Consumption | Less than 45 mA |

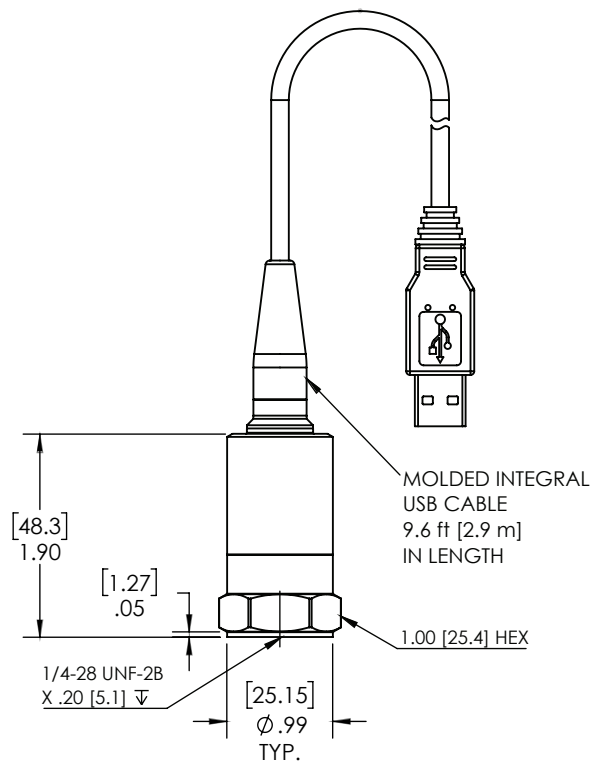

Model 333D01
Technical Drawing

| SYSTEM COMPONENTS ^[3] | |
|----------------------------------|------------------------------------|
| Product Name | Model Number |
| Digital USB Accelerometer | 333D01 |
| Mounting Stud 1/4-28 | 081A40 |
| Curved Surface Mount | 080A131 |
| Probe Tip 2 in | 080A107 |
| Adapter Cables | USB to Lightning, USB to Micro USB |
| Soft Protective Storage Case | 2000X13 |
| VibeCheck App | Free Measurement App |

- [1] Useful for bearing fault and gear mesh
- [2] Temp spec is for sensor, refer to smartphone temp specs separately
- [3] User supplied smartphone

Specifications at room temperature unless otherwise specified



Taking Data

ISO Group Selection

Test Report



10310 Aerohub Boulevard, Cincinnati, OH 45215 USA

modalshop.com | info@modalshop.com | 800 860 4867 | +1 513 351 9919