

Model Number
9917C

MICROPHONE COMPARISON CALIBRATOR

Revision: NR
ECN#:

PERFORMANCE

Frequency Range	20 Hz to 10 kHz ^[1]
Microphone Pressure Calibration Accuracy ^[2]	±0.5 dB
Source Signal for 1 Pa Output (250 Hz)	2.6 mV
Source Signal for 1 Pa Output (1 kHz)	3.2 mV
Source Signal for 1 Pa Output (10 kHz)	500 mV
Distortion (%THD, 250 Hz, 94 dB SPL)	≤1%

ELECTRICAL

Maximum Input Voltage	2 V pk
-----------------------	--------

ENVIRONMENTAL

Temperature Range (Operating)	40 °F to 122 °F (4.4 °C to 50 °C)
Temperature Range (Storage)	-40 °F to +176 °F (-40 °C to +80 °C)


MECHANICAL

Housing Material	Aluminum
Size (Length x Width x Height)	4.7 x 1.6 x 1.6 inches (119 x 41 x 41 mm)
Source Input	BNC Jack

NOTES:


- [1] 94 dB SPL (re. 20e-6 Pa)
[2] This is the maximum expected difference of sound pressure between the two microphone diaphragms.

PRODUCT DRAWING

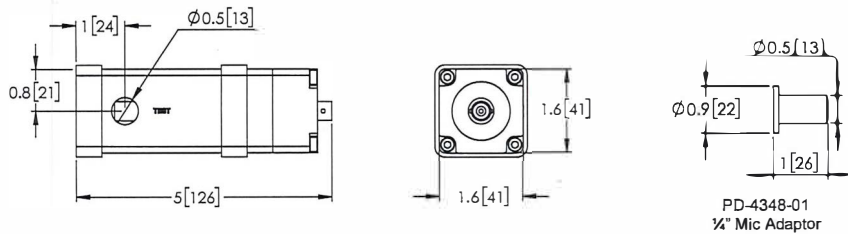

Dimensions are in inches [mm].

BLOCK DIAGRAM

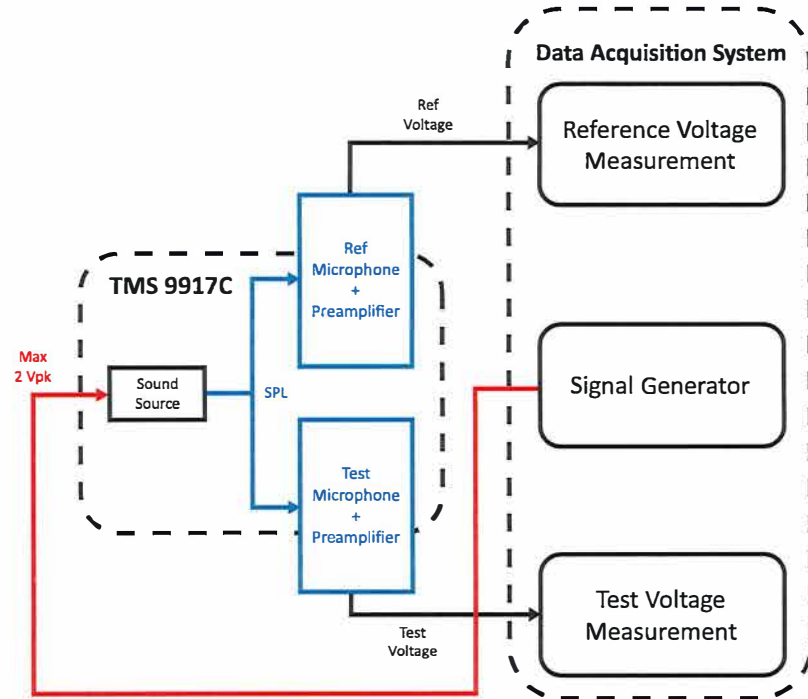

All specifications are at room temperature unless otherwise specified.
ICP is a registered trademark of PCB Piezotronics, Inc.
In the interest of constant product improvement, specifications may change without notice.



Project Engineer:

MPG

Date: 10/30/2018

Product Manager:

MPG

Date: 10/30/18

SAM Team Leader:

CJO

Date: 11/1/18

Spec Number:

PS-0152

Page 1 of 1

THE MODAL SHOP
AN MTS COMPANY

10310 Aerohub Boulevard
Cincinnati, OH 45215 USA

info@modalshop.com
+1 513.351.9919

+1 800.860.4867
Fax: +1 513.458.2172

SAM-F020 revB 05/17/18