



MODEL 9155D-550

RESONANCE TEST OPTION

- Integrates industry's best air-bearing shaker (Models K394B30 and K394B31) for accurate, automated resonance search testing up to 50 kHz
- Provides early warning detection technique for damaged sensors
- Allows user to select frequency resolution for optimal sweep measurements
- Easy-to-use software GUI automates sweep measurement and interface with 9155 calibration software and database
- Sweep runs directly on the K394B30 or K394B31 air-bearing shaker systems, eliminating the need to remount the sensor under test, streamlining sensor calibration throughput
- Provides rapid, efficient measurements in just seconds



FOR CALIBRATION SYSTEM MODEL 9155

The Accelerometer Calibration Workstation with Model 9155D-550 Resonance Test option allows the user to measure a sensor's mounted resonant frequency using the Model K394B30/B31 state-of-the-art precision air-bearing shaker. Unlike other air-bearing shakers, the resonance frequency of the internal reference of the K394B30/B31 shaker is > 70 kHz giving it a truly usable range for resonant searches up to 50 kHz. As the search is done with the shaker, no remounting of the sensor is required, making the resonance search take only seconds after the normal back-to-back calibration is performed.

By measuring the mounted resonant frequency of a sensor, tiny cracks and other flaws in the sensor can be detected well before the sensor actually fails.

The Accelerometer Calibration Workstation Model 9155 features back-to-back comparison calibration of piezoelectric (PE), capacitive (VC) and piezoresistive (PR) mode accelerometers for both sensitivity and phase according to ISO 16063-21. Printed certificates fulfill the requirements set forth by ISO 17025 for calibration certificates.


SPECIFICATIONS	
Performance	
Frequency Range	5 kHz to 50 kHz
Frequency Resolution	12.5, 25, or 50 Hz
Test Technique	Back-to-back sweep
Reference	
Mounted Resonance ^[1]	> 70 kHz
Software Compatibility	9155 v.4.0.0 or later
Hardware Compatibility	NI PCI-4461
Other System Options	
9155D-100	19 in Rack Integration. Approx. 36.5 in H x 21.75 in W x 26 in D [93 cm x 55 cm x 66 cm]. Integrates components in 19 in rack.
9155D-120	Shaker Mount. Provides wood pedestal to support calibration shaker. Requires user to fill with sand (not included).
9155D-160	Tool Kit. Includes torque wrench, screwdrivers, crescent wrenches, toolbox, etc.
9155D-350	Calibration Label Printing. Provides automatic calibration label printing using a Zebra thermal transfer label printer.
9155D-400	TEDS Sensor Support. Provides for automatic update of TEDS sensors. Requires 9155D-443 option.
9155D-442	Basic ICP Signal Conditioning. Adds signal conditioner for ICP and charge mode sensors.
9155D-443	Dual-mode Charge Amplifier. Computer control and automated switching between ICP and charge mode sensors.
9155D-445	Capacitive Sensor Signal Conditioning. Adds signal conditioner for capacitive sensors.
9155D-478	Piezoresistive Signal Conditioning. Adds support for piezoresistive sensors. Includes PCB 478A30 signal conditioner.
9155D-501	Linearity. Provides for multipoint sensor linearity checks via sinusoidal vibration up to 40 g.
9155D-525	Shock Calibration. Provides for verification of shock accelerometers from 20 g to 10 000 g.
9155D-575	Laser Primary Calibration. Adds primary calibration capability as specified in ISO 16063-11.
9155D-600	Velocity Sensor Calibration. Allows calibration of velocity sensors. Reports data in velocity units.
9155D-771	Low Frequency (0.5 Hz – 500 Hz). Long stroke shaker with SmartStroke™ technology and accelerometer reference sensor.
9155D-779	Low Frequency (0.1 Hz – 500 Hz). Long stroke shaker with SmartStroke™ technology, accelerometer and optical reference sensors.
9155D-830	K394B30 Air-Bearing Shaker. Adds precision air-bearing shaker 5 Hz – 15 kHz.
9155D-831	K394B31 Air-Bearing Shaker. Adds precision high-frequency air-bearing shaker 5 Hz – 20 kHz.
9155D-961	Hammer Calibration. Allows calibration of instrumented impact hammers, includes 9961C cal fixture

[1] Mounted resonance of the internal reference sensor in the K394B30/B31

RESONANCE TEST OPTION

The 9155D-550 Resonance Test option seamlessly integrates with the 9155 Accelerometer Calibration Workstation software. With just a few mouse clicks, the calibration technician can go from frequency response calibration to resonance search. The Model 9155D-550 Resonance Test option requires either the Model 9155D-830 K394B30 Air-Bearing Shaker or Model 9155D-831 K394B31 Air-Bearing Shaker.

9155-550 Software

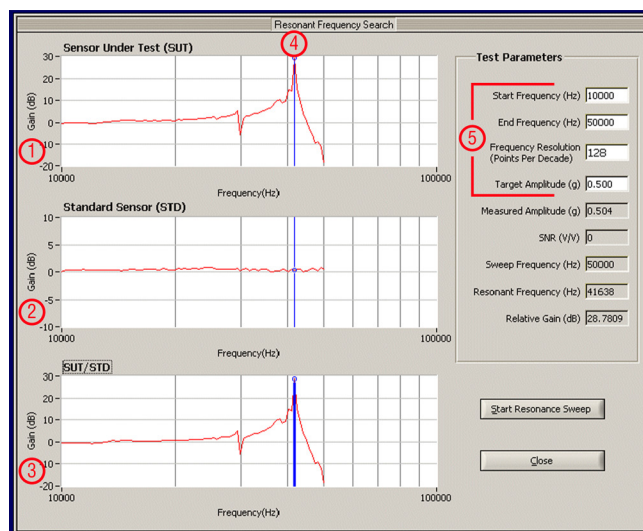

1. Frequency Spectrum Sensor Under Test
2. Frequency Spectrum Standard Sensor
3. Frequency Response Function
4. Automated resonant frequency selection
5. Technician-controlled frequency range, resolution and amplitude



10310 Aerohub Boulevard, Cincinnati, OH 45215 USA

Toll-Free in the USA: 800 860 4867

Phone: 1 513 351 9919 | Email: info@modalshop.com

The Modal Shop, Inc. offers structural vibration and acoustic sensing systems and services for various applications in design and test laboratories as well as manufacturing plants. An extensive sound and vibration rental program, precision calibration systems, and both modal and vibration shakers are designed to simplify test phases. Non Destructive Testing Systems help manufacturers provide 100% quality inspection of metal components. The Modal Shop, Inc. is a subsidiary of PCB Piezotronics, Inc., and PCB® is a wholly owned subsidiary of MTS Systems Corporation.

© 2019 The Modal Shop, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLine™ is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States. All other trademarks are property of their respective owners.

DS-0040 revD



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.